

10/528292

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
1 April 2004 (01.04.2004)


PCT

(10) International Publication Number  
WO 2004/027932 A2

- (51) International Patent Classification<sup>7</sup>: H01R (74) Agent: SPATH, Thomas, E.; Abelman, Frayne & Schwab, 150 East 42nd Street, New York, NY 10017-5612 (US).
- (21) International Application Number: PCT/US2003/029921
- (22) International Filing Date: 17 September 2003 (17.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/411,477 17 September 2002 (17.09.2002) US
- (71) Applicant (for all designated States except US): SAUDI ARABIAN OIL COMPANY [SA/SA]; R-3296, Administration Building, Dhahran 31311 (SA).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): FLANDERS, Patrick, S. [US/SA]; PO Box 10799, C/O Saudi Arabian Oil Company, Dhahran 31311 (SA).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published: — without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: FIRE SAFETY FUSIBLE LINK ELECTRICAL TERMINAL BLOCK

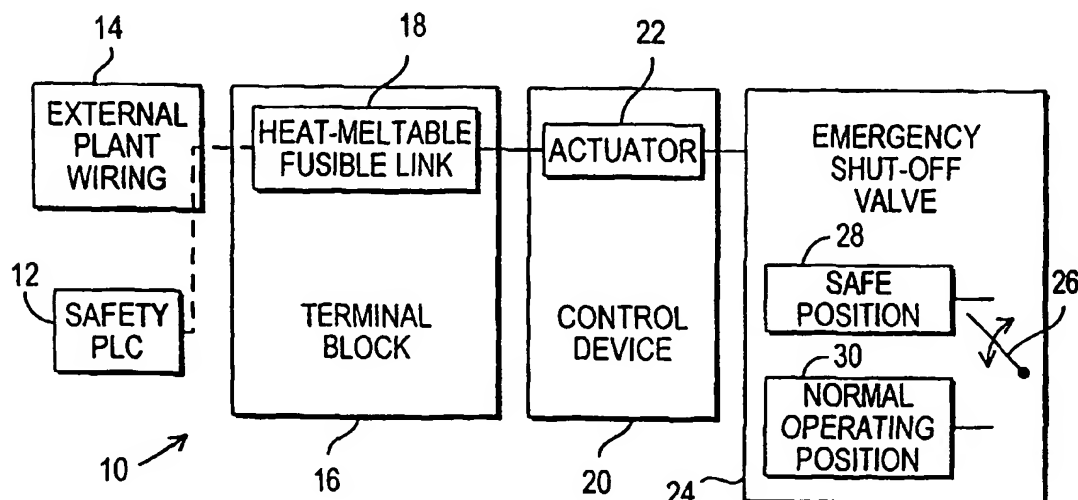

(57) Abstract: An electrical terminal block has a heat-meltable fusible link establishing a closed electrical circuit between a conductor and an actuator responsive to a control signal transmitted by conductor for controlling the state of an emergency process control device, such as a shut-off valve. The heat-meltable fusible link melts in response to heat exceeding a predetermined temperature to establish an open electrical circuit between the electrical conductor and the actuator thereby causing the actuator to move the emergency process control device to a safe position or state.

WO 2004/027932 A2